

StroBell - Combined Fire Bell & Visual Alarm Device

A combined fire alarm bell and visual alarm device, using market leading aluminium for excellent sound output and the latest in LED technology to maximise light output.

The VimpeX StroBell is ideal for installations that call for both a traditional bell tone as well as a visual alarm.

As with the VimpeX sounder range, all bells can be supplied branded with your company logo.

Features



- Utilises market-leading bell design
- Ultra bright strobe in clear lens for maximum light output
- Familiar installation method
- Selectable flash rate - 30/60 per minute
- Low current consumption
- Single point of installation minimises wiring and associated costs
- Strobe synchronisation with no additional wiring (synchronisation not covered by approval)
- Can be wired as a two stage alarm, with both bell and visual alarm on separate circuits (not approved in this configuration)

Specification

Model No.:	SNV0004
Light Colour:	White
Supply Voltage:	19.2 - 28.8Vdc. (24Vdc Nominal)
Current Max:	45mA
Sound Output:	95dB(A) at 1 metre
Light Output:	54.8 Lux
Gong Colour:	Red
Gong Construction:	Aluminium
IP Rating:	21
Weight:	580g
Operating Temperature:	-20 to +55 °C



Installation

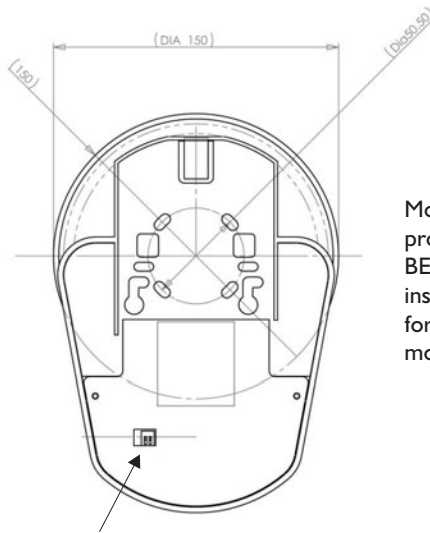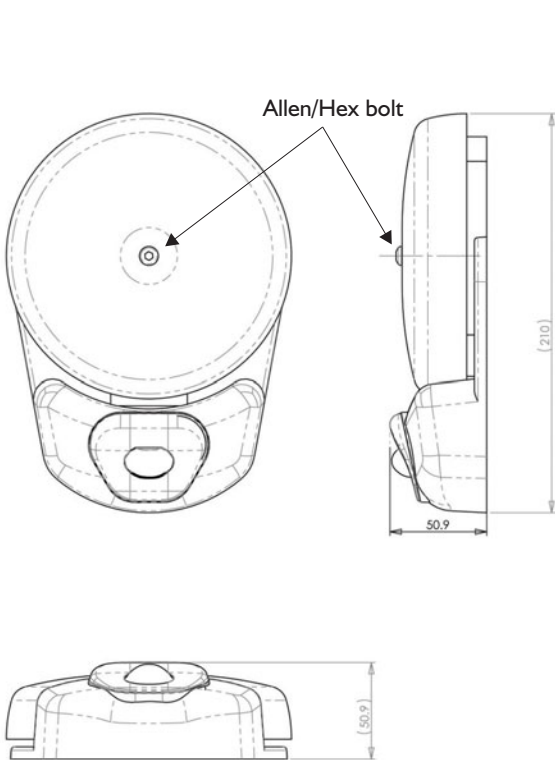


Mounting holes are provided to suit either BESA single gang installation boxes or for direct wall mounting.

DIL Switch Settings

Flash Interval: 1s (SW 1 ON), 2s (SW 1 OFF)

Flash Intensity: Reduced (SW 2 ON), Normal (SW 2 OFF)

Front of StroBell with Gong removed

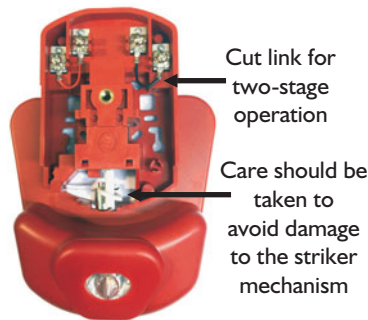

Wiring

Upper Terminals: Bell

Lower Terminals: VAD

United Kingdom **Vimpex Ltd**
 Star Lane, Great Wakering
 Essex SS3 0PJ England
 Tel: +44 (0) 1702 216999
 E-mail: sales@vimpex.co.uk
www.vimpex.co.uk

Sweden **Vimpex-Interguard AB**
 Tel: +46 (0) 36 37 10 65
 E-mail: sales@vimpex.se
www.vimpex.se



Assessed to ISO 9001
 Cert/LPCB ref. 456



DS/STROBELL-TD/ISS 3

